





Typical Performance

ESL2720-2113

(ESL1270-030-20-0201130)

EXALOS AG

Wagistrasse 21
CH-8952 Schlieren, Switzerland
Tel. +41 43 444 60 90
Fax +41 43 444 60 99
sales@exalos.com
www.exalos.com

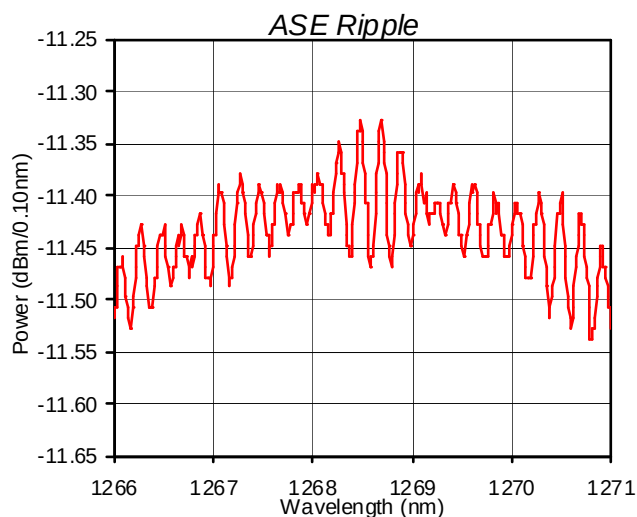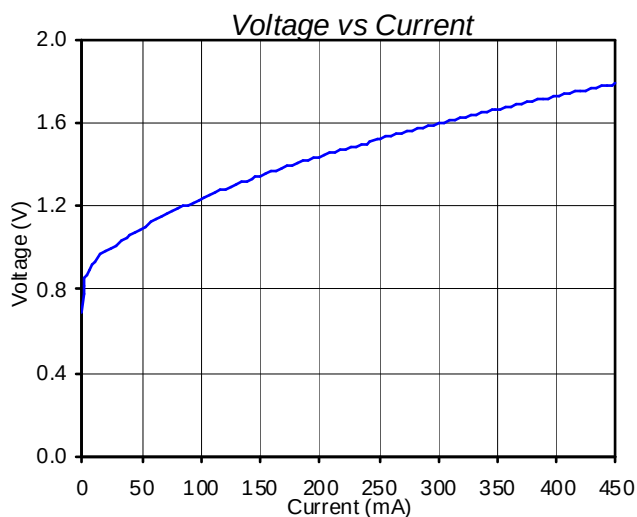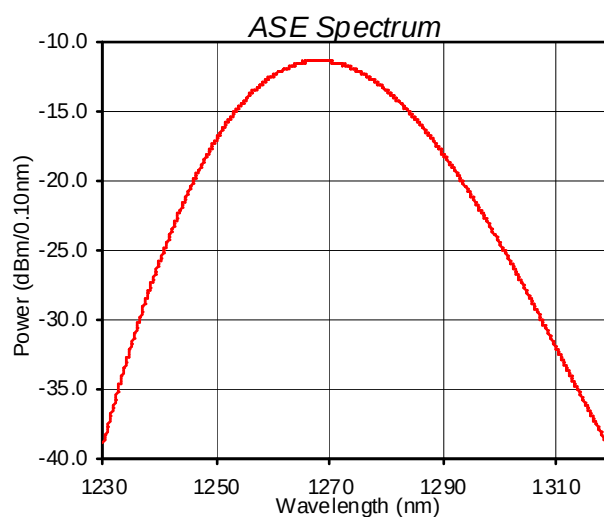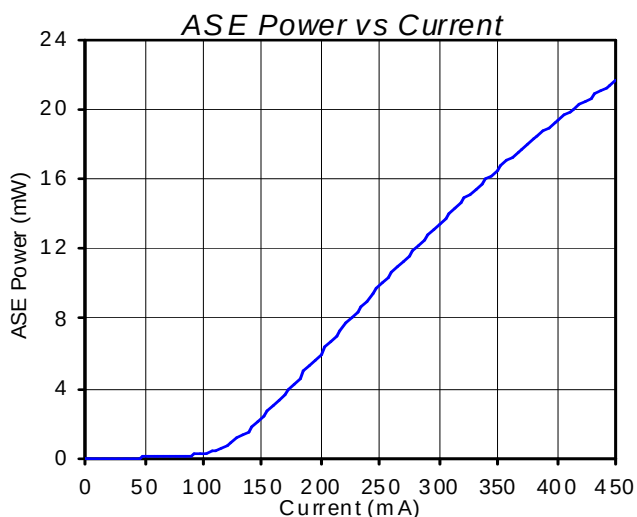

Max. Power: 21.63 mW
Mean WL: 1269.2 nm
Center WL: 1268.4 nm
3-dB BW: 29.5 nm
ASE Ripple: 0.14 dB
MPD Current @ I_{op} : 500 μ A

Date: 22.02.2012, Time: 14:35:48
 T_{device} : 20.00 $^{\circ}$ C, T_{case} : 20.00 $^{\circ}$ C
 I_{TEC} : 0.33 A, V_{TEC} : 0.48 V
 I_{op} : 450.0 mA (@ 1.79 V)